




ALUINCH **F** series

For Glass 6 mm , 8 mm , 10 mm , 12 mm and 15 mm.

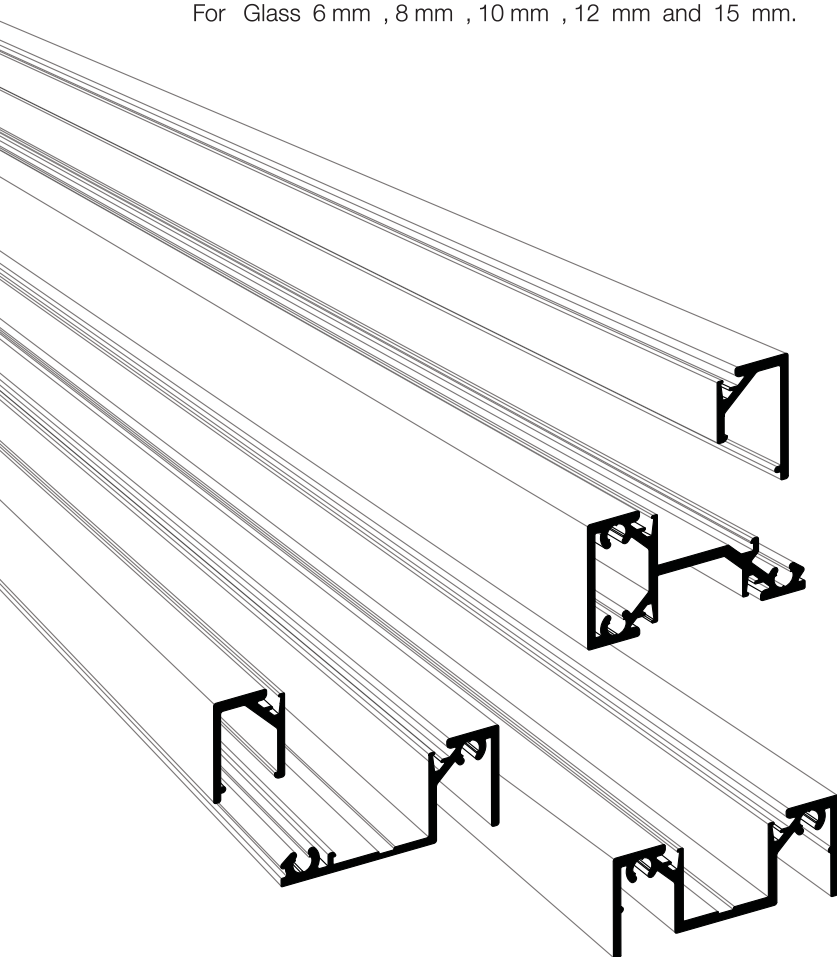


ด้วยการออกแบบหน้าต่างที่เล็กลงให้เหลือเพียง 45 มม. ใส่กระจกได้ตั้งแต่ 6-12 มม. โดยการใช้ยางอัดกระจกและ 15 มม. แบบใช้ซิลิโคน ทำให้ใช้สเปซและฟังก์ชันของพื้นที่ได้อย่างเต็มที่ ผสมผสานความหรูหราเข้ากับราคาได้อย่างลงตัว ทั้งยังสามารถตอบสนองความต้องการได้ทั้งรูปแบบและงบประมาณแต่คงไว้ซึ่งความแข็งแรง ด้วยระบบ **F series** ที่ถูกคิดสรรมาเป็นอย่างดีและใส่ใจในทุกๆ รายละเอียด จึงเป็นแบบฉบับสินค้าของ ALUINCH


Designed with a smaller cross section. to only 45 mm. Glass can be put from 6-12 mm by using glass rubber and 15 mm with silicone, allowing space and function. The heat of it is comfortable with the price. It also can meet the needs of both formats and modes. But it maintains a relationship with a well-chosen **F series** system and attention to detail in order. The typical product of ALUINCH .

ALUINCH


fSeries




F-20.01 MINI SNAPING MULLION
ตบเรียบ รุ่เหล็ก 20 มม.




F-20.02 MINI MULLION 20 mm.
กล่องร่อง รุ่เหล็ก 20 มม.




F-25.03 MINI HEAD TRACK 25 mm.
กล่องร่อง รุ่เหล็ก 25 มม.
ใช้คู่กับ F-25.04




F-20.05 MINI GLAZING BAR
กล่องเปิด รุ่เหล็ก 20 มม.
ใช้คู่กับ F-20.06




F-20.06 MINI GLAZING BEAD
ฝาปิด รุ่เหล็ก 20 มม.
ใช้คู่กับ F-20.05




F-25.04 SNAPING MULLION 25 mm.
ตบร่อง รุ่เหล็ก 25 มม.
ใช้คู่กับ F-25.03




F-25.07 TRANSOM FRAME 25 mm.
ซอยลูกฟักรุ่เหล็ก 25 มม.
ใช้คู่กับ F-25.08




F-25.08 TRANSOM BEAD 25 mm.
ฝาปิดซอยรุ่เหล็ก 25 มม.
ใช้คู่กับ F-25.07




F-35 DOOR STOP 35 mm.
บังใบสำหรับบาน 35 มม.



F-01C MINI CONNER ALUMINIUM RAIL
เสาเหลี่ยม 45 มม.

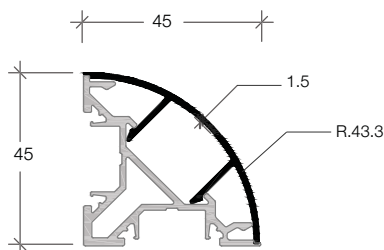

F-02C MINI CONNER DOME SHAPE
เสาโค้ง 45 มม.



F-45 DOOR STOP 45 mm.
บังใบสำหรับบาน 45 มม.



2.02

MEETS YOUR DESIRE ...

fSeries

CH+27.4EEL

100 100 100 EQ 2700 EQ 100 100

900 900

ALUNCH F-SERIES

F-SERIES ALUMINIUM FRAME
20 MM. X 45 MM.

ALUNCH DOOR HINGE

H.35 STAINLESS DOOR HINGE

ALUNCH HANDLE

LV.06 LEVER HANDLE
MW.01 MORTISE LOCK
KV.35 KNOB CYLINDER

A

B



20 MM. X 45 MM.

SURFACE : ANODIZED 12 (±2) MICRON

MATERIAL : ALUMINIUM ALLOY 6063T5

THICKNESS: 1.5 MM.



SIZE : 16 MM. X 45 MM.

SURFACE : ANODIZED 12 (±2) MICRON

MATERIAL : ALUMINIUM ALLOY 6063T5

THICKNESS: 2.0 MM.

ALUNCH F.35
ALUNCH F-20.02
STARNDARD
C-STUD 65 MM.

CHK. ON SITE

WOODS
DOOR IS.ML

Timber
Support

90

STANDARD 12 MM.
PLASTERBOARD LINING
ALUNCH AS.01
ALUNCH HANDLE

20 16 20 25

35


12 66 12

STANDARD 12 MM.
PLASTERBOARD LINING
ALUNCH H.35


A SECTION
STANDARD DETAIL

A SECTION
STANDARD DETAIL

ONE-WAY SWING DOOR 45 MM. THK. WITH HINGES

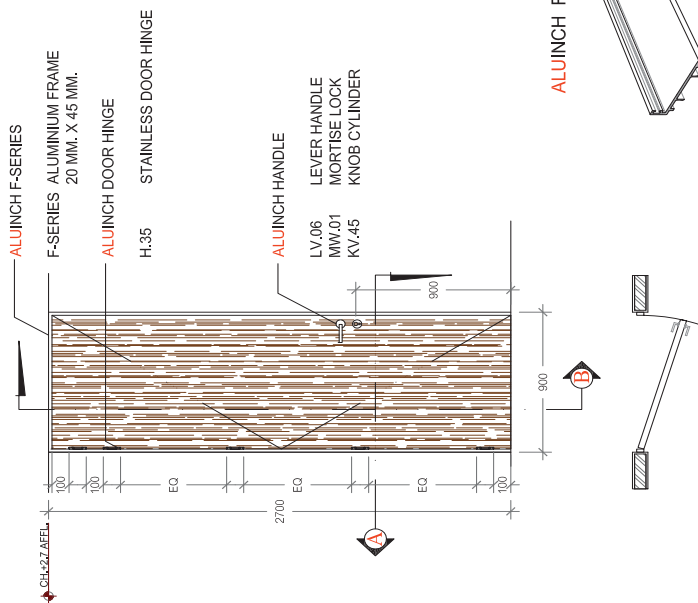


ALUINCH F-20.02

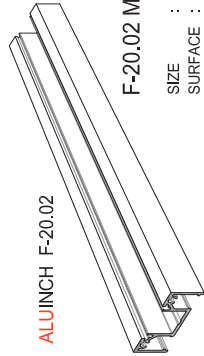

F-20.02 MINI MULLION 20 MM.


SIZE : 20 MM. X 45 MM.
SURFACE : ANODIZED 12 (±2) MICRON
MATERIAL : ALUMINIUM ALLOY 6063T5
THICKNESS: 1.5 MM.

ALUINCH F.45

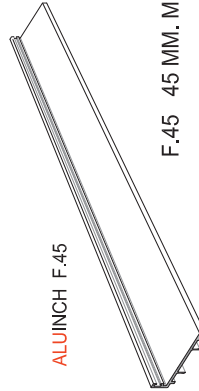


F.45 45 MM. MINI DOOR STOP

SIZE : 16 MM. X 54 MM.
SURFACE : ANODIZED 12 (±2) MICRON
MATERIAL : ALUMINIUM ALLOY 6063T5
THICKNESS: 2.0 MM.

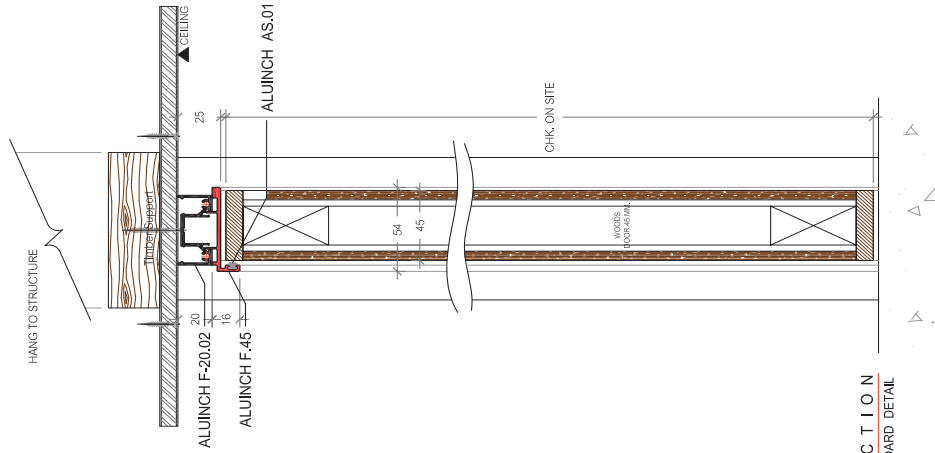


B SECTION
STANDARD DETAIL

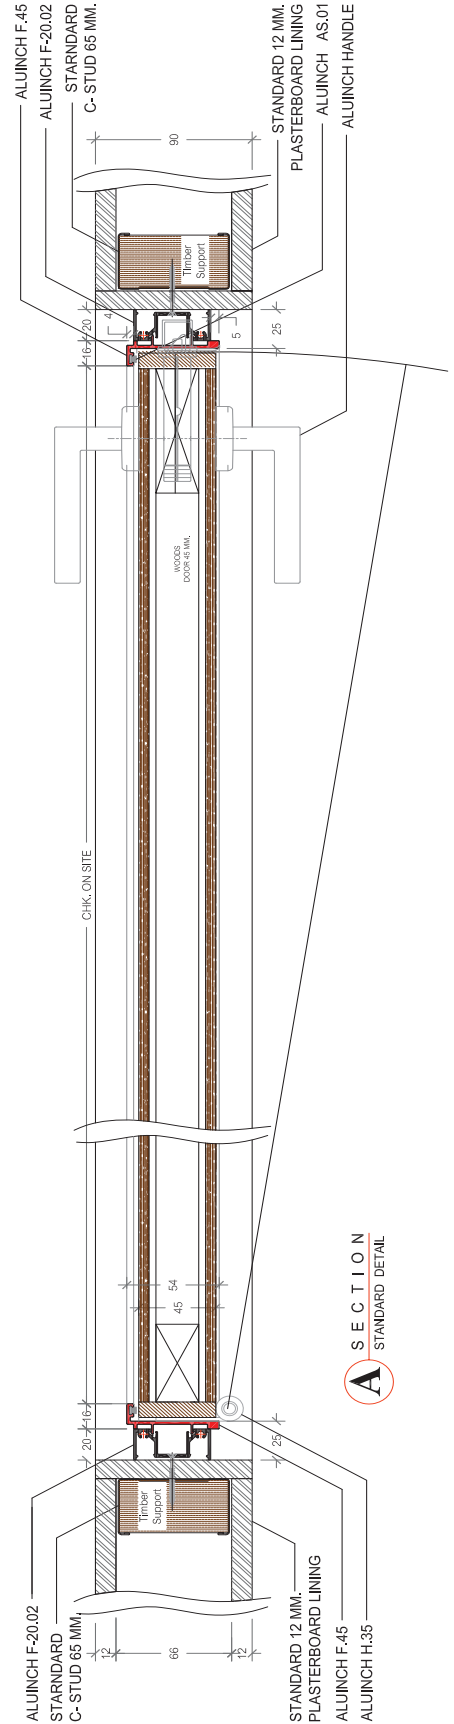


A SECTION
STANDARD DETAIL

ONE-WAY SWING DOOR 45 MM.THK.WITH HINGES

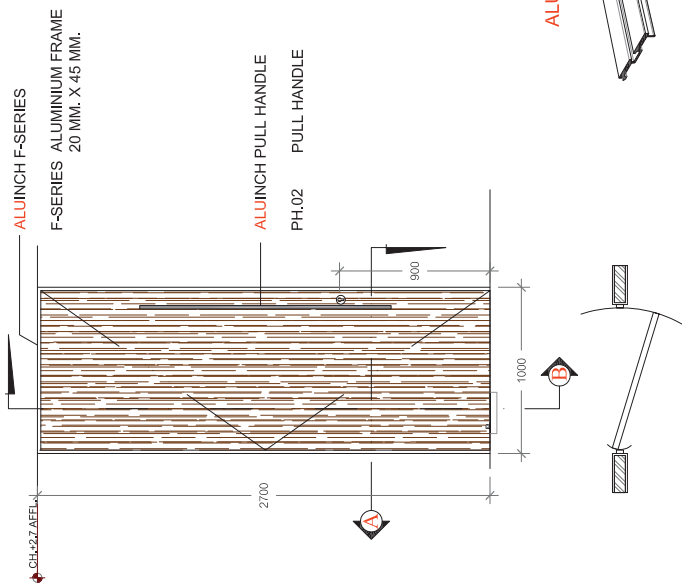

ALUINCH F-20.02

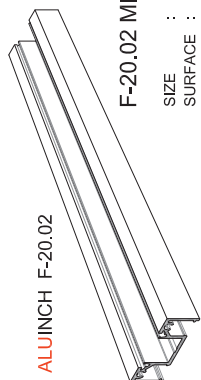

F-20.02 MINI MULLION 20 MM.


SIZE : 20 MM. X 45 MM.
SURFACE : ANODIZED 12 (±2) MICRON
MATERIAL : ALUMINUM ALLOY 6063T5
THICKNESS: 1.5 MM.

ALUINCH T.10S




T.10S FLUSH STOP WITH MOHAIR

SIZE : 24 MM.
SURFACE : ANODIZED 12 (±2) MICRON
MATERIAL : ALUMINUM ALLOY 6063T5
THICKNESS: 1.7 MM.

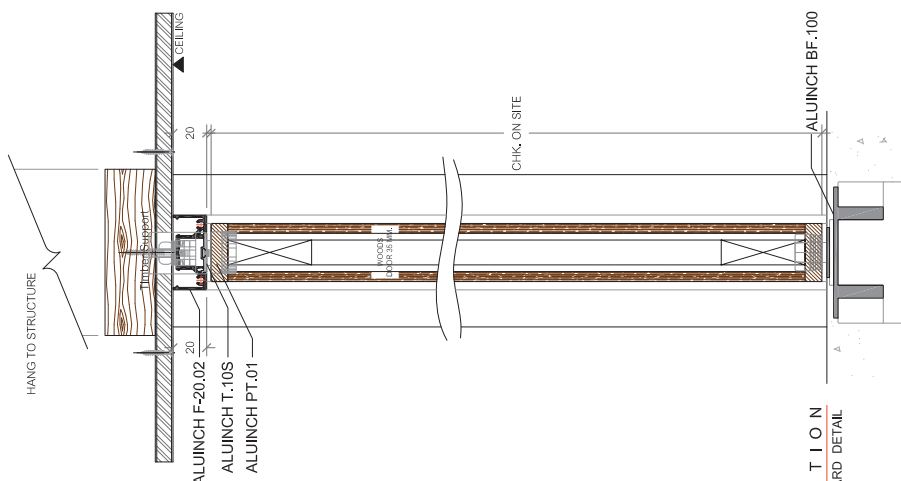

B SECTION
STANDARD DETAIL



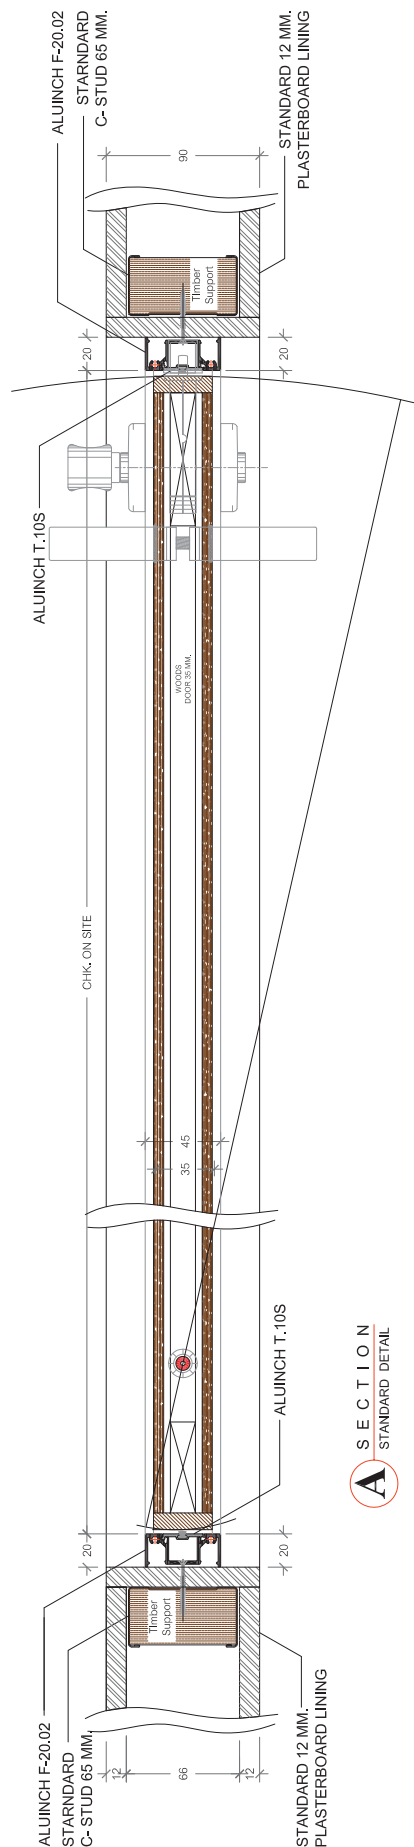


A SECTION
STANDARD DETAIL


ONE-WAY SWING DOOR 35 MM.THK.WITH FIXED GLASS




PARTITION FIXED CENTER GLASS 6 - 15 MM.THK.

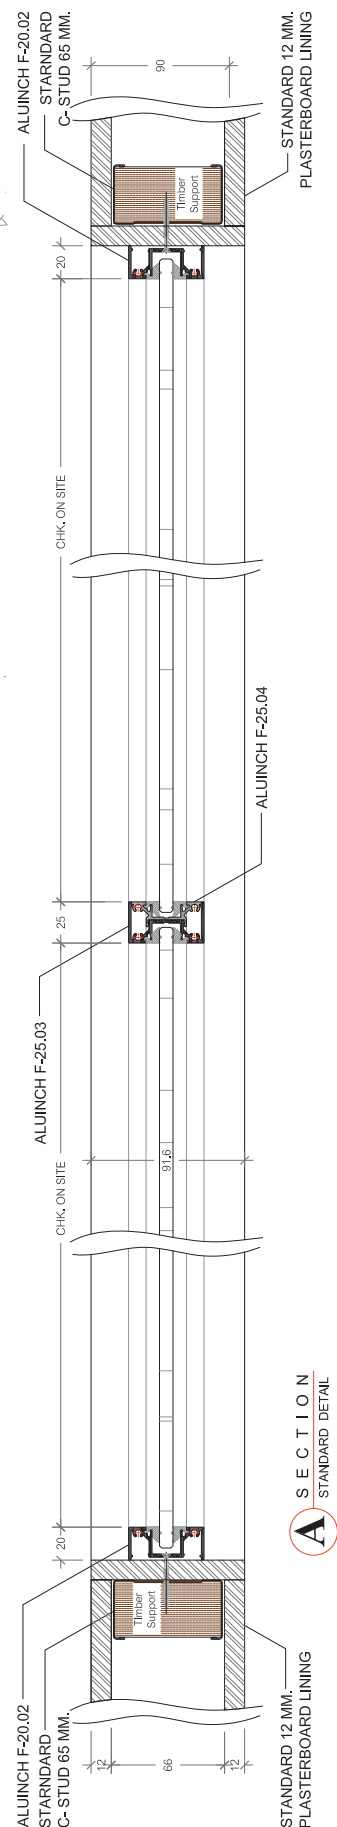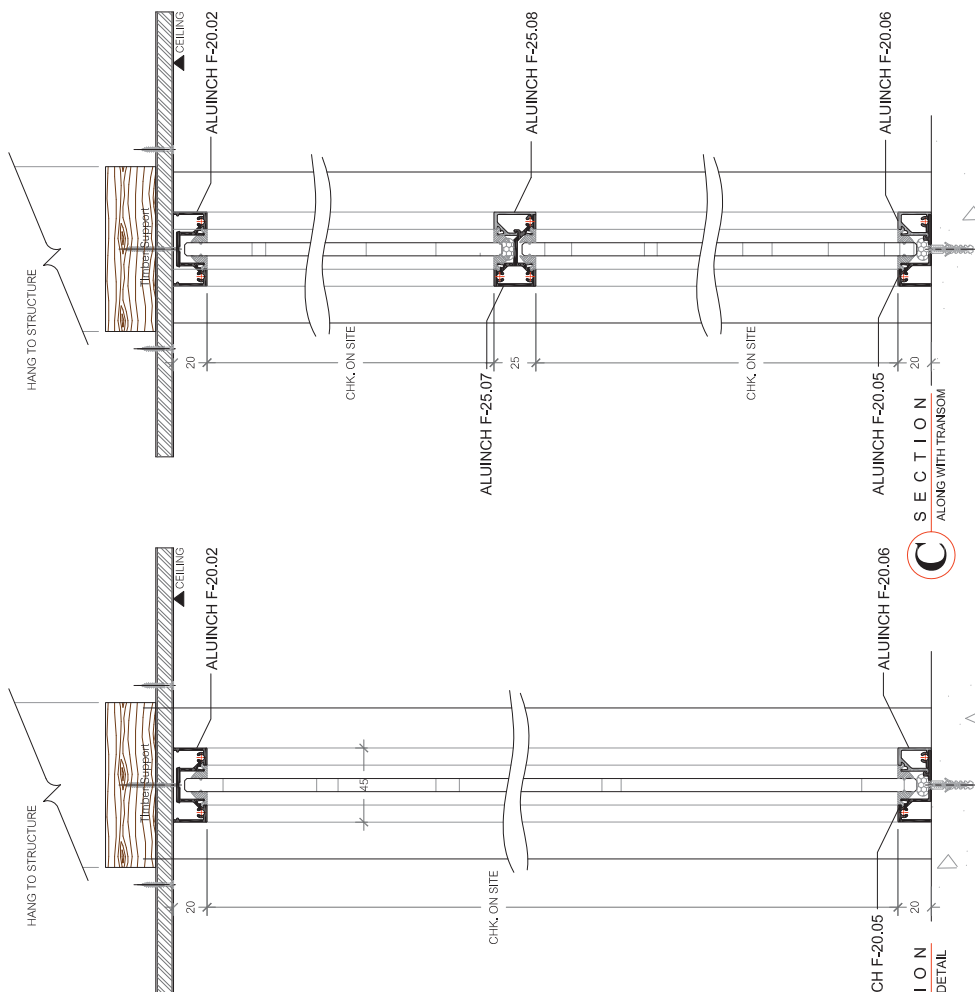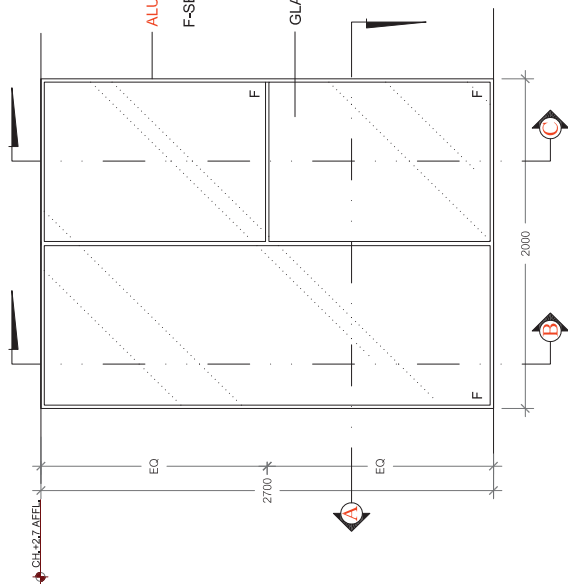

ONE-WAY SWING ALUMINIUM DOOR 35 MM. THK. WITH HINGES

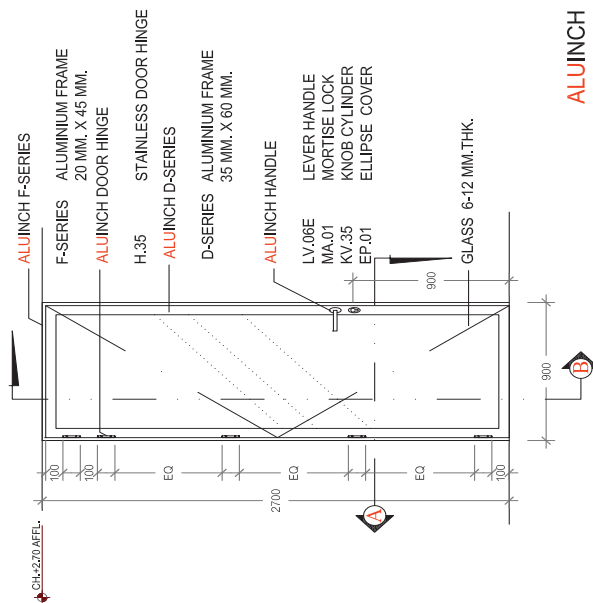


ALUINCH F-20.02

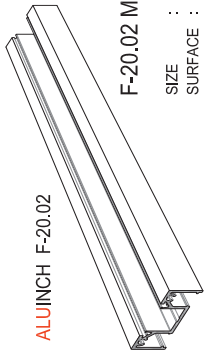

F-20.02 MINI MULLION 20 MM.

SIZE : 20 MM. X 45 MM.
SURFACE : ANODIZED 12 (± 2) MICRON
MATERIAL : ALUMINIUM ALLOY 6063T5
THICKNESS: 1.5 MM.


ALUINCH F.35

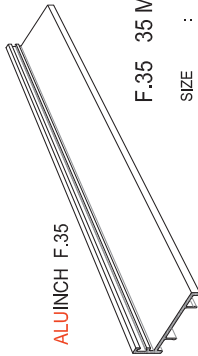

F.35 35 MM. MINI DOOR STOP

SIZE : 16 MM. X 45 MM.
SURFACE : ANODIZED 12 (± 2) MICRON
MATERIAL : ALUMINIUM ALLOY 6063T5
THICKNESS: 2.0 MM.


ALUINCH D-60

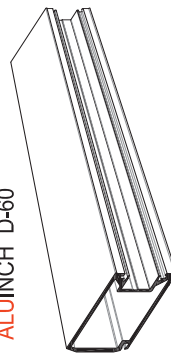

D-60 VERTICAL DOOR


SIZE : 36 MM. X 60 MM.
SURFACE : ANODIZED 12 (± 2) MICRON
MATERIAL : ALUMINIUM ALLOY 6063T5
THICKNESS: AVERAGE 2.0 - 3.0 MM.

B SECTION
STANDARD DETAIL

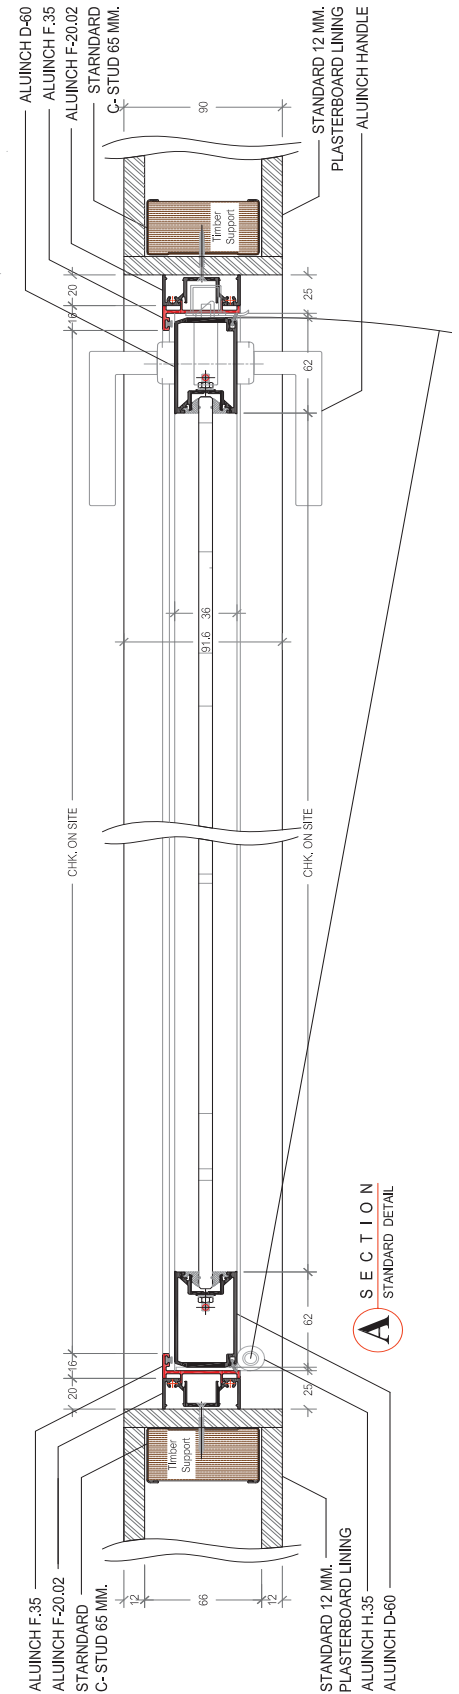


A SECTION
STANDARD DETAIL

ONE-WAY SWING DOUBLE ALUMINIUM DOOR 35 MM. THK. WITH HINGES

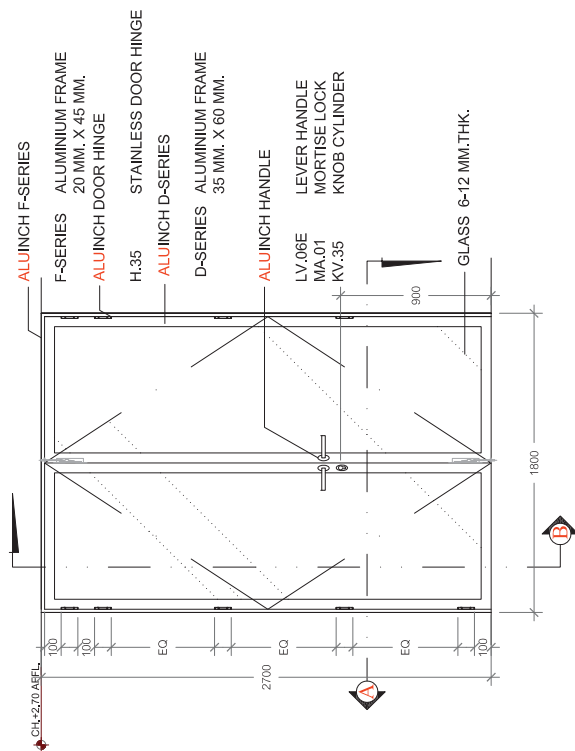


ALUINCH D-60

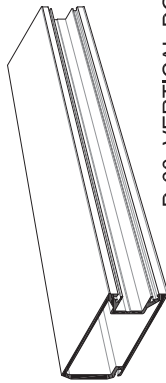

D-60 VERTICAL DOOR

SIZE : 36 MM. X 60 MM.
SURFACE : ANODIZED 12 (±2) MICRON
MATERIAL : ALUMINIUM ALLOY 6063T5
THICKNESS: AVERAGE 2.0 - 3.0 MM.


ALUINCH D-66



D-66 VERTICAL REBATE

SIZE : 22 MM. X 16 MM.
SURFACE : ANODIZED 12 (+2) MICRON
MATERIAL : ALUMINIUM ALLOY 6063T5
THICKNESS: 1.5 MM.

B SECTION
STANDARD DETAIL

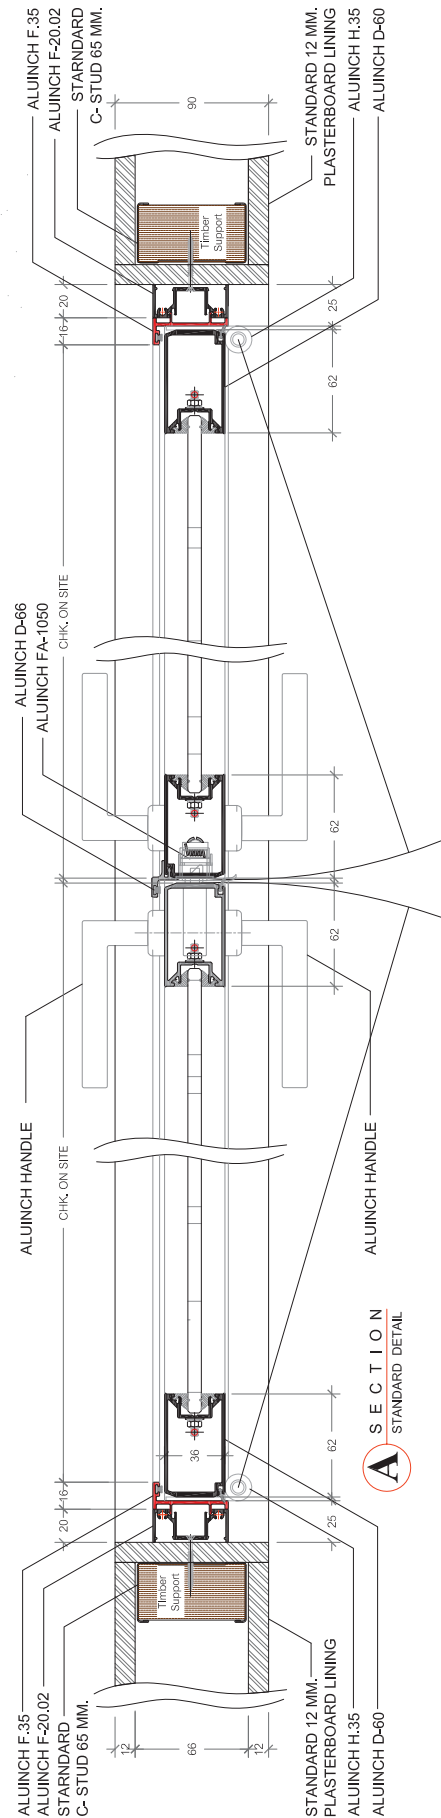

A SECTION
STANDARD DETAIL

